

SolarEdge Optimizer Pairing Procedure




NOTE: This must be completed during the day.




Button located here

1. Locate the green "LCD Light" button on the bottom of the inverter:

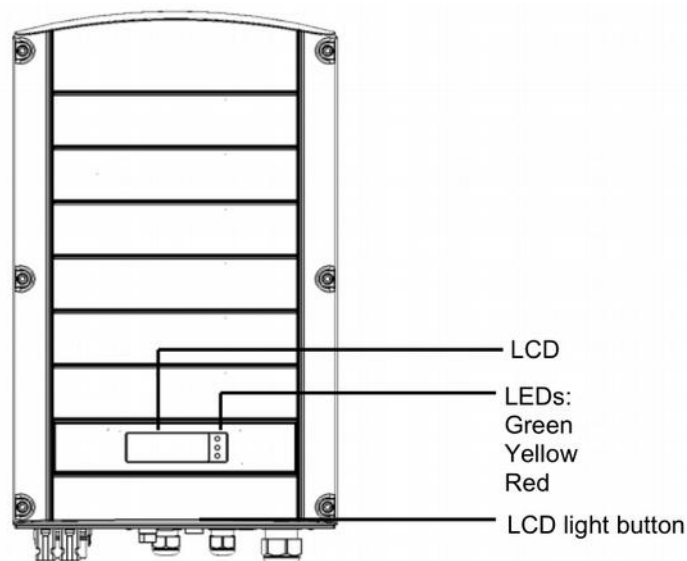

2.

Press and hold down the LCD light button until the following message is displayed:

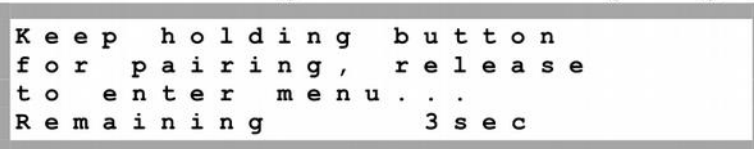

Keep holding the button as shown on the screen. The pairing process will begin. It may take 5-15 minutes. Afterwards, the system will begin producing power.

The screen will display the optimizers found over total optimizers seen so far next to P_OK:



After 15 minutes or so, all optimizers should be accounted for, matching the number of panels that you have:



At this point, energy production will be maximized and your production meter will be spinning:

